


PERFORMANCE VALUES FOR PLASTER CEILINGS


Heating and cooling ceiling
with integrated capillary tube mat OPTIMAT SB 20 - plaster thickness 10-15 mm



SPECIFIC COOLING CAPACITY ACC. TO DIN 4715 / DIN EN 14240

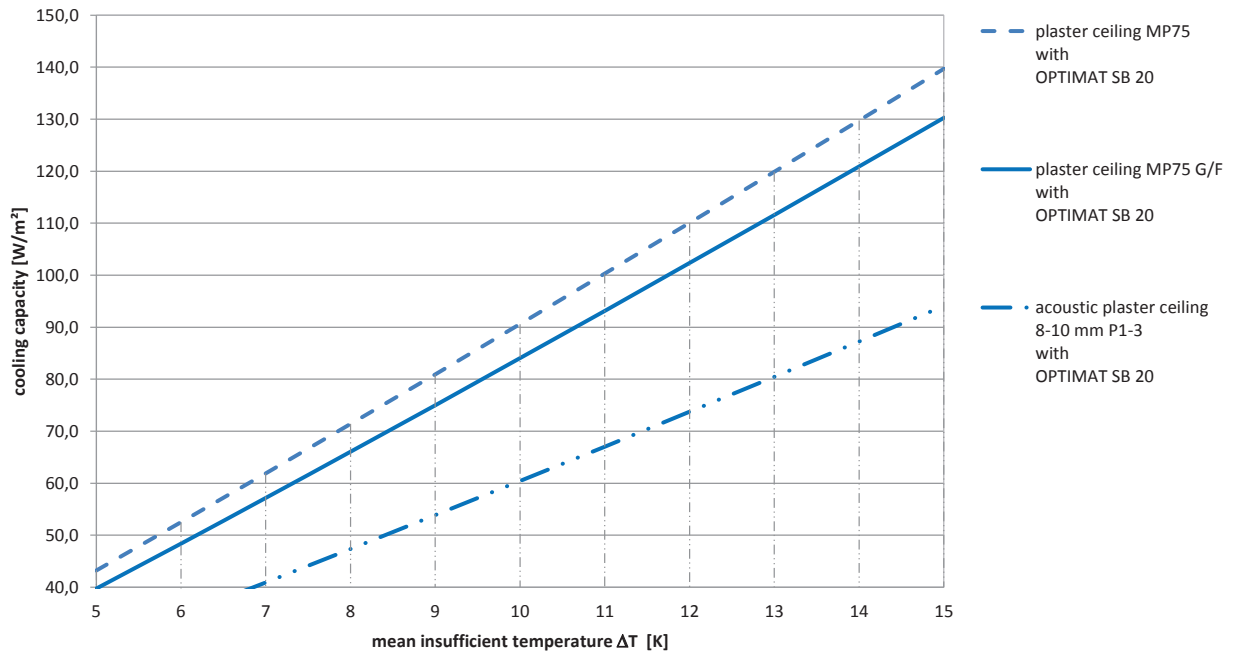

SPECIFIC HEATING CAPACITY ACC. TO DIN 4715 / DIN EN 14240 / 14037-5 (DRAFT)

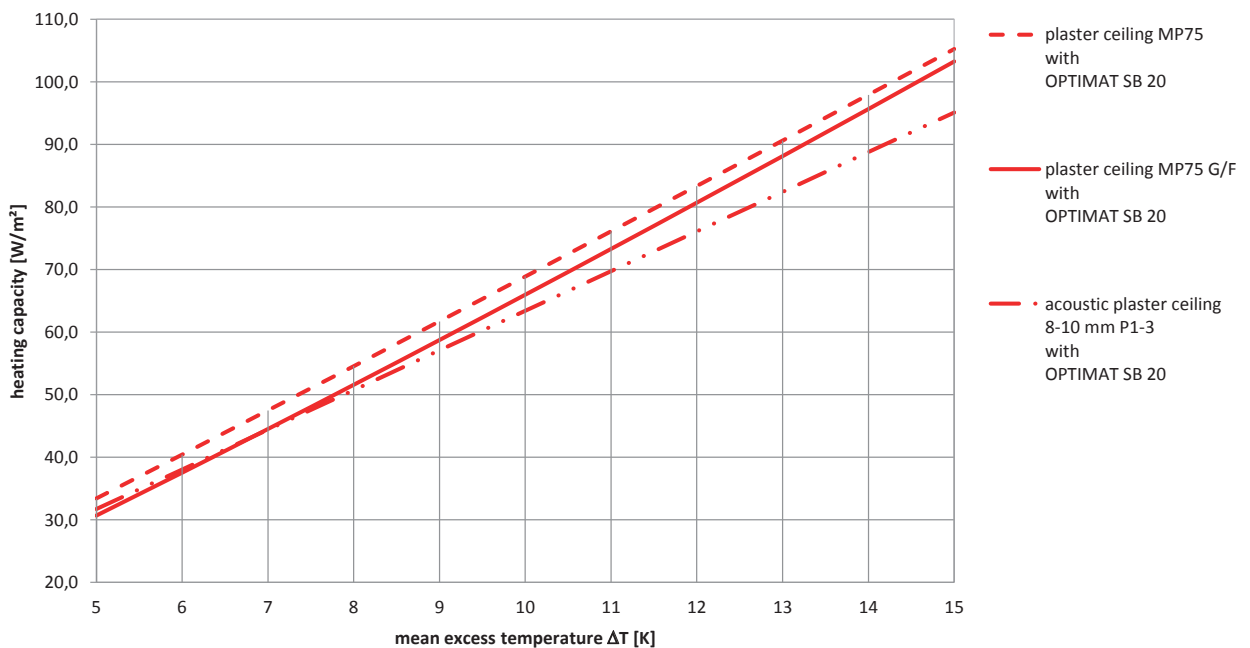

CONTACT

Clina Heiz- und Kühlelemente GmbH
Lübarser Straße 40 - 46 | 13435 Berlin

Fon: + 49 30 402054 – 0
Fax: + 49 30 402054 – 19

www.clina.de
info@clina.de